




Omnidirectional GSM/UMTS/LTE antenna suitable for places with low GSM/3G/4G signal reception.

Hardware details

Frequency range:	700/800/900/1700/1800/1900/
	2100/2600 MHz
Radiation:	H-360° , V-30°
Polarization:	Linear
Gain:	5 dBi
VSWR:	<2.0:1
Impedance:	50 Ω
Power handling:	30 W max.

Mechanical Specification

Attachment manner:	Magnetic
Available connector:	SMA (m)
Cable:	RG58, 3 m
Operating temperature:	- 40° to + 85°C
Weight:	301.04 g
Dimension:	Ø 65 mm x 460 mm

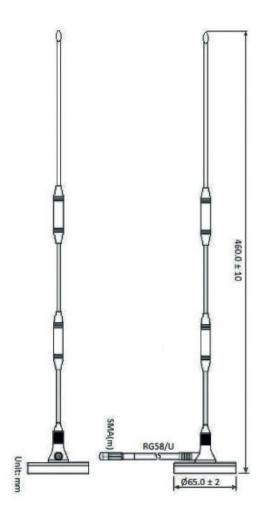

Product accessories: https://www.smseagle.eu/products/accessories/