



SMSEagle

Antenna UMTS/LTE 5 dBi

Tech datasheet




PRODUCT DESCRIPTION

Antenna GSM/UMTS/LTE 5dBi suitable for places with low GSM/3G/4G signal reception.

SPECIFICATION

Frequency range:	700/800/900/1700/1800/1900/2100/2600 MHz
Radiation:	H-360° , V-30°
Polarization:	Linear
Gain:	5 dBi
VSWR:	<2.0:1
Impedance:	50 Ω
Power handling:	30 W max.

DRAWING

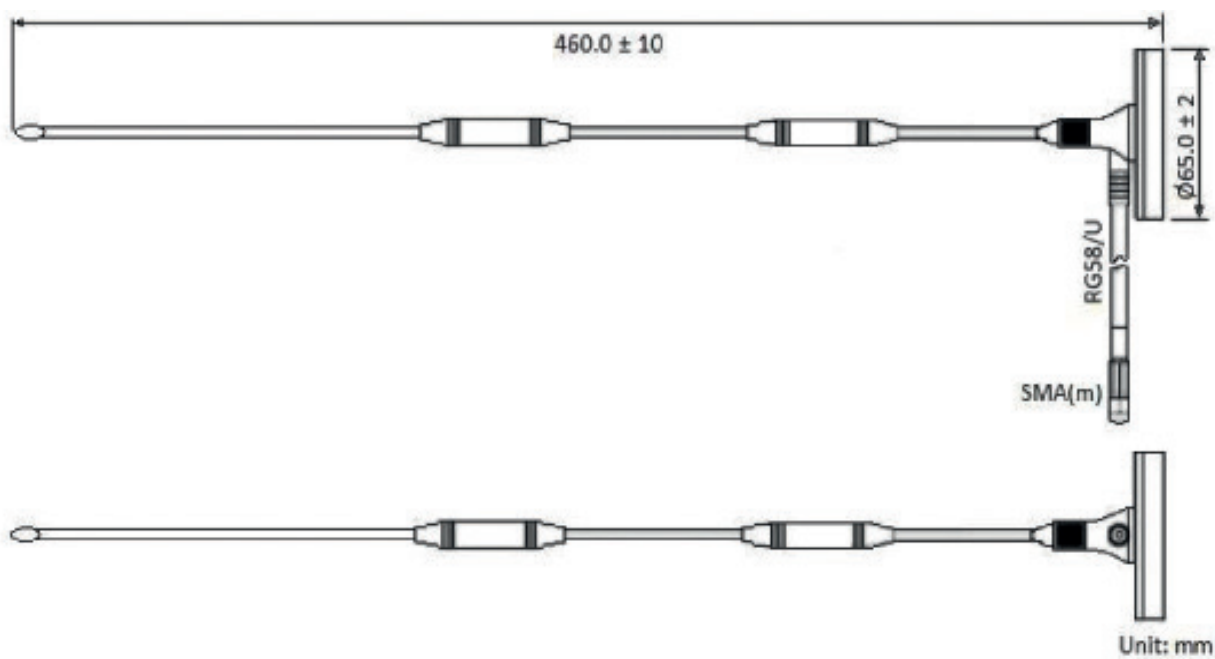

MECHANICAL SPECIFICATION

Attachment manner:	Magnetic
Available connector:	SMA (m)
Cable:	RG58, 3 m
Operating temperature:	- 40° to + 85°C
Weight:	301.04 g
Dimension:	$\varnothing$ 65 mm x 460 mm



Ul. Piątkowska 163, 60-650
Poznań, Poland | Europe

M +48 61 6713 413
E hello@smseagle.eu
www.smseagle.eu